



300m x 200m slab gets its sprinkler main.




A new build Irish bottling plant on the former Ince Power Station site in Cheshire had a truly gigantic sprinkler requirement.

To service the sprinkler system a 16 bar HDPE sprinkler main was supplied and installed by Woodford Plastics around the perimeter of the site before the concrete slab was laid.

Due to the unexpected speed at which the concrete slabs progressed, the contractor was left with only 2 weeks to install & test the main.

Woodford Plastics took the challenge head on and mobilised a highly skilled team to work extend shifts and weekends to complete the task set by the contractor.

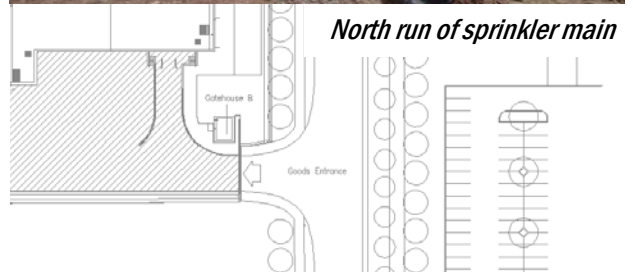

Scope Of Work

- Pre-fabricate large sections of manifold in the workshop.
- Transport to site and assemble to drawing.
- Install all connecting pipe-work.
- Weld all sections together.



Other products and services:

Plastic pipe & fittings supply

Plastic Pipe & fittings installation

Plastic tanks and vessels

Secondary containment systems

GRP structures and walkways

PTFE lined steel pipes & fittings

Bespoke plastic fabrications

Special points of interest:

- Large sections pre-fabricated in the workshop.
- Final joints welded on site
- Contract completed on-time
- Contract completed on budget
- Fast track program, extended & weekend working

Woodford Plastics Limited, Star Works, Wham Street, Heywood, Lancs OL10 4QU

Tel: 01706 366667 **Email:** sales@woodfordplastics.co.uk

Fax: 01706 366616 **Web site:** www.woodfordplastics.co.uk